
LPL3.5UU


Indirect / Direct

Suspended Wall

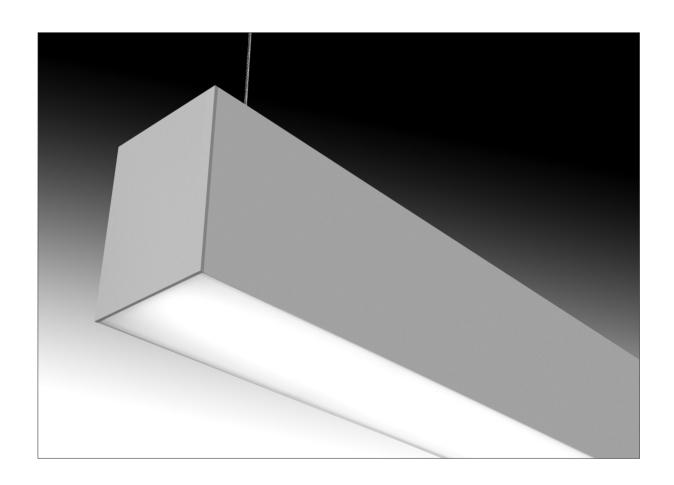


LIGHT FORMS

Dimensions

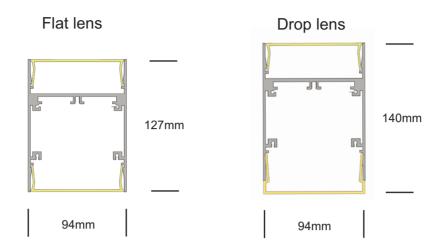

Distribution

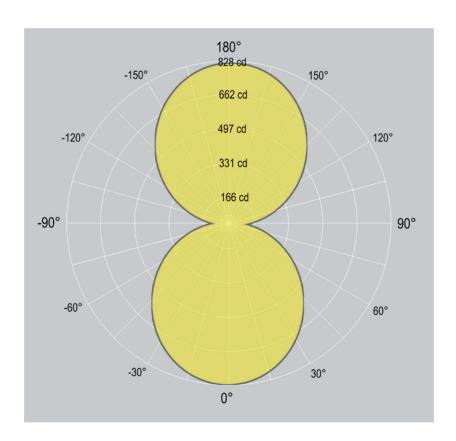

LPL3.5UU

indirect / Direct - Suspended, Wall Mounted



1. Base Model			
LPL3.5UU-S	Suspended - (Indirect / Direct)		
LPL3.5UU-WM	Wall Mounted - (Indirect / Direct)		
		LPL3.5UU-WM	
	LPL3.5UU-S	Wall Mounted	
	Suspended	I	
	_		
2. Run Length			
	Enter total linear length	n, (example: 6M)	
3. LED (indirect uplight) - leave blank if	no indirect light desired or P	LANTER OPTION is chosen	
, , , , , , , , , , , , , , , , , , , ,	SINGLE ROW LINEAR		
STD - xxxxK (example: STD-4000K)	Standard Output, LED 2x20W/M 4800 delivered lumen, 97 lm/W		
OTD - AAAAR (example: OTD-4000R)	Otandard Output, LLL	ounded output, EED EXECUTION 1000 dointolog lamon, or military	
HI - xxxxK (example: HI-4000K)	High Output, LED 2x30W/M 6400 delivered lumen, 92 lm/W		
	CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K		
		Oual LED strip available	
	Additional LED Optio	ns	
CV - xxxxK	Constant Voltage (for custom lengths) 24/12VDC		
	Contact factory for detail		
TW	Tunable White (2700K - 6500K)		
DCDW	Contact factory for detail		
RGBW	RGB+WHITE - 24/12VDC		
	Contact factory for detail		
5. LED Driver			
0/1-10V	0/1-10V dimming		
DALI	DALI dimming		
DMX	DMX dimming		
NONDIM	Non-dimmable		
OTHER	(Consult factory for options)		
6. Finish			
AL	Standard, natural aluminum		
BK	Black powdercoat		
WH	White powdercoat		
Custom	Custom Color		
7. Additional options			
EM	1.5 hour Emergency Kit		
MS	Motion sensor		
Others	Contact factory		

LPL3.5UU

indirect / Direct - Suspended, Wall Mounted

LIGHT FORMS

Housing

100% recyclable, extruded architectural grade T6063 aluminum

Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup. Consult factory for options.

Options

Mitered Corners


Consult factory for mitered corner angle options.

Finish

Standard finish is "Ultimatte" aluminum - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process.

White, Black, and Custom powdercoat options are also available.









WH - WHITE

AL - ALUMINUM

BK - BLACK

CUSTOM/_

Default canopy finish is to match fitting color, unless otherwise specified













ISO 9001:2015

China

Unit 3, Building A No. 9 Phoenix Road Torch Development Area Zhongshan City Guangdong China 528437

T +86 760 899 370 38 F +86 760 899 370 39 E ckirin@lightforms.com.cn UK

Unit 7C Boeing Way International Trading Estate Middlesex UB2 5LB

T +44 (0)20 8571 3785 F +44 (0)20 8090 3755 E ask@lightforms.com India

353/2 Dr Hira Singh Road Civil Lines Ludhiana 141001 Punjab, India

T +91 98 7280 0488

E ajay@lightforms.com

Light FormsArchitectural Lighting www.lightforms.com

Registered in England No. 6750892 Registered Address Unit 7C Boeing Way International Trading Centre Middlesex, UB2 5LB

