

LIGHTPLANE 1 - LPL1

Direct or Indirect

Suspended
Wall
Surface



LIGHTPLANE 1 — LPL1

Suspended, Wall, Surface (Indirect or Direct)

**LIGHT
FORMS**




LIGHTPLANE 1 — LPL1


Suspended, Wall, Surface (Indirect or Direct)

LIGHT FORMS

Dimensions

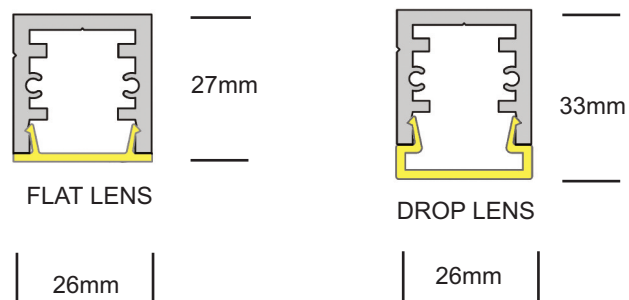

Distribution

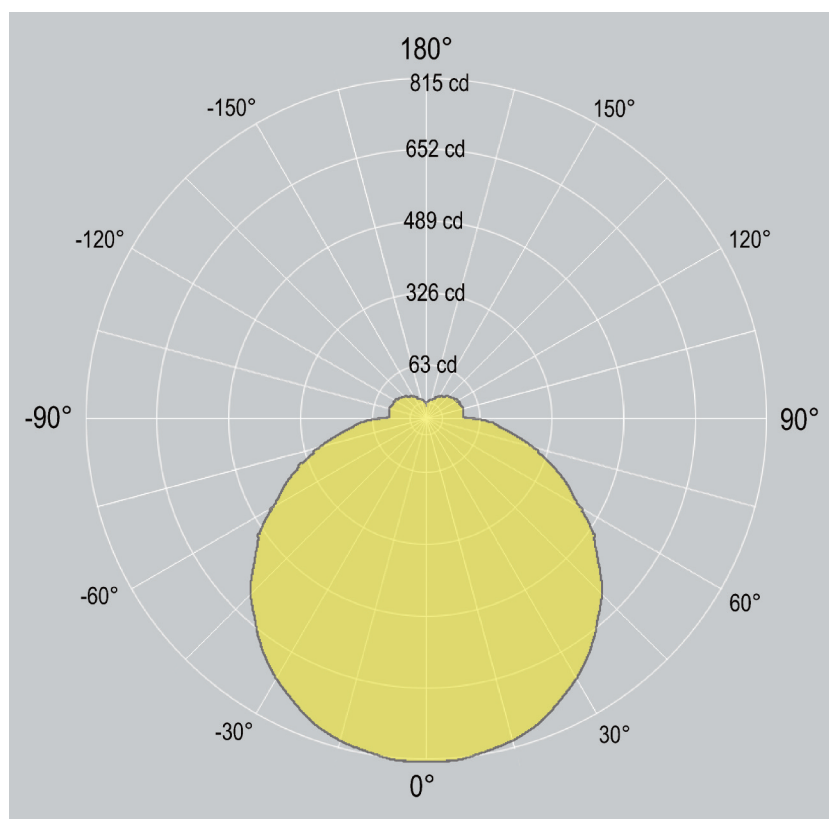





LIGHTPLANE 1 — LPL1

Suspended, Wall, Surface (Indirect or Direct)



1. Base Model

LPL1-SD	Suspended (Direct)
LPL1-WMI	Wall Mounted (Indirect)
LPL1-WMD	Wall Mounted (Direct)
LPL1-SM	Surface Mounted (back mounted, front facing)

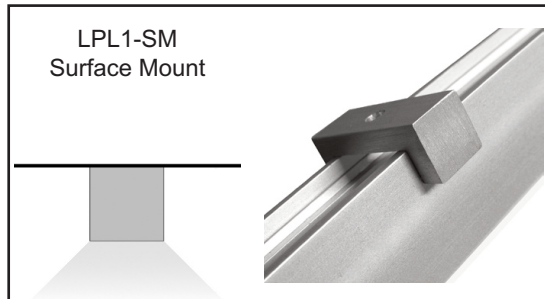

2. Run Length

Enter total linear length, (example: 6M)

3. LED Lamping

STD - xxxxK (example: STD-4000K)	Standard Output , LED 20 W/M, 1850 delivered lm/M , 79 lm/W @ 4000K
HI - xxxxK (example: HI-4000K)	High Output , LED 30 W/M, 2600 delivered lm/M, 75 lm/W @ 4000K
	CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K
CV - xxxxK	Additional LED Options Constant Voltage (for custom lengths) - 12Vdc/24Vdc <i>Contact factory for detail</i>
TW	Tunable White (2700K - 6500K) <i>Contact factory for detail</i>
RGBW - xxxxK	Standard Output - RGB+WHITE - 12Vdc/24Vdc <i>Contact factory for detail</i>

LIGHTPLANE 1 — LPL1

Suspended, Wall, Surface (Indirect or Direct)


**LIGHT
FORMS**

4. LED Driver (remote only)

0/1-10V	0/1-10V dimming
DALI	DALI dimming
DMX	DMX dimming
NONDIM	Non-dimmable
OTHER	(Consult factory for options)

5. Lens

FLAT	Flat Lens
DROP	Drop Lens

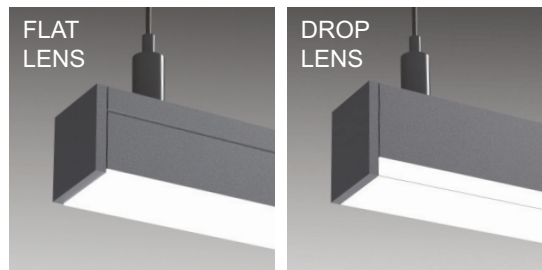

6. Finish

AL	Standard, natural aluminum
BK	Black powdercoat
WH	White powdercoat
Custom	Custom Color

7. Additional options

EM	1.5 hour Emergency Kit
MS	Motion sensor
Others	Contact factory

LIGHTPLANE 1 — LPL1

Suspended, Wall, Surface (Indirect or Direct)

LIGHT FORMS

Housing

100% recyclable, extruded architectural grade T6063 aluminum

Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup. Consult factory for options.

Options

Mitered Corners

Consult factory for mitered corner angle options.


Finish

Standard finish is "Ultimatte" aluminum - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process.

White, Black, Custom powdercoat options also available.




Suspension & Power



Mitered Corners



WH - WHITE



AL - ALUMINUM



BK - BLACK



Custom/____

Default canopy finish is to match fitting color, unless otherwise specified



ISO 9001:2015

China

Unit 3, Building A
No. 9 Phoenix Road
Torch Development Area
Zhongshan City
Guangdong China 528437

T +86 760 899 370 38
F +86 760 899 370 39
E ckirin@lightforms.com.cn

UK

Unit 7C Boeing Way
International Trading Estate
Middlesex
UB2 5LB

T +44 (0)20 8571 3785
F +44 (0)20 8090 3755
E ask@lightforms.com.cn

India

353/2 Dr Hira Singh Road
Civil Lines
Ludhiana 141001
Punjab, India

T +91 98 7280 0488
E ajay@lightforms.com

Light Forms

Architectural Lighting
www.lightforms.com

Registered in England
No. 6750892
Registered Address
Unit 7C Boeing Way
International Trading Centre
Middlesex, UB2 5LB