

# MOONRING 2.5

LPL2.5MD

Suspended  
Surface




# MOONRING 2.5 LPL2.5MD


Suspended, Surface

**LIGHT  
FORMS**

## Dimensions

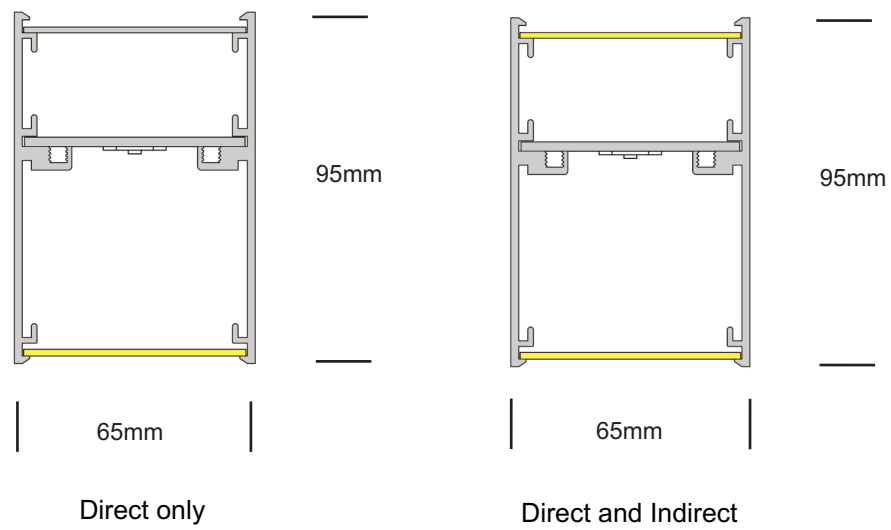

## Distribution

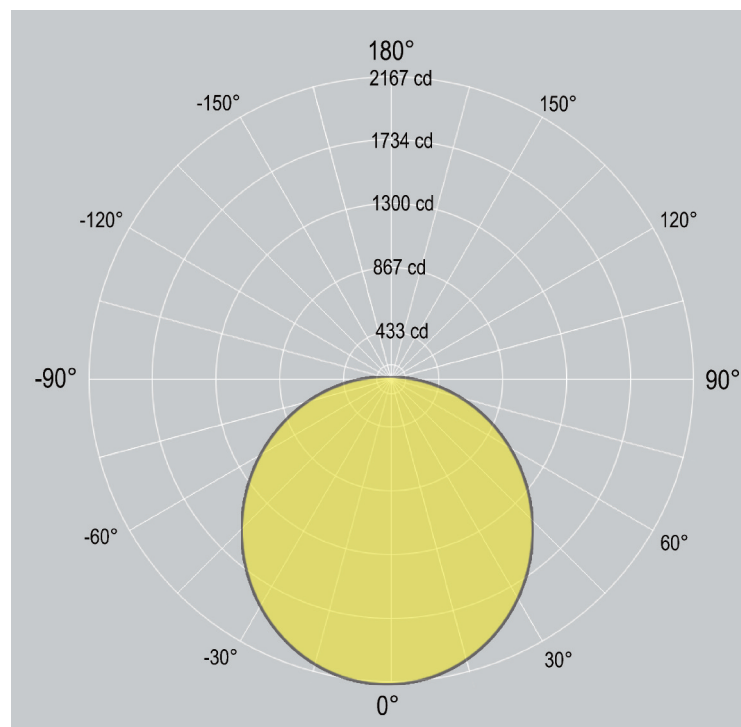

# MOONRING 2.5 LPL2.5MD

Suspended, Surface




## 1. Base Model (Diameter customized, for complex designs order each pice separately to be joined together)

### CIRCLES

LPL2.5MD-S-1.2M - CIRCLE	1.2M Diameter - Suspended Circle
LPL2.5MD-SM-1.2M - CIRCLE	1.2M Diameter - Surface Mounted Circle
LPL2.5MD-S-1.5M - CIRCLE	1.5M Diameter - Suspended Circle
LPL2.5MD-SM-1.5M - CIRCLE	1.5M Diameter - Surface Mounted Circle
LPL2.5MD-S-1.8M - CIRCLE	1.8M Diameter - Suspended Circle
LPL2.5MD-SM-1.8M - CIRCLE	1.8M Diameter - Surface Mounted Circle
LPL2.5MD-S-2.4M - CIRCLE	2.4M Diameter - Suspended Circle
LPL2.5MD-SM-2.4M - CIRCLE	2.4M Diameter - Surface Mounted Circle

CIRCLE



### HALF CIRCLES

LPL2.5MD-S-1.2M - HCIRCLE	1.2M Diameter - Suspended Half Circle
LPL2.5MD-SM-1.2M - HCIRCLE	1.2M Diameter - Surface Mounted Half Circle
LPL2.5MD-S-1.5M - HCIRCLE	1.5M Diameter - Suspended Half Circle
LPL2.5MD-SM-1.5M - HCIRCLE	1.5M Diameter - Surface Mounted Half Circle
LPL2.5MD-S-1.8M - HCIRCLE	1.8M Diameter - Suspended Half Circle
LPL2.5MD-SM-1.8M - HCIRCLE	1.8M Diameter - Surface Mounted Half Circle
LPL2.5MD-S-2.4M - HCIRCLE	2.4M Diameter - Suspended Half Circle
LPL2.5MD-SM-2.4M - HCIRCLE	2.4M Diameter - Surface Mounted Half Circle

HALF CIRCLE



### 1/4 ARCS

LPL2.5MD-S-1.2M - 1/4 ARC	1.2M Diameter - Suspended 1/4 ARC
LPL2.5MD-SM-1.2M - 1/4 ARC	1.2M Diameter - Surface Mounted 1/4 ARC
LPL2.5MD-S-1.5M - 1/4 ARC	1.5M Diameter - Suspended 1/4 ARC
LPL2.5MD-SM-1.5M - 1/4 ARC	1.5M Diameter - Surface Mounted 1/4 ARC
LPL2.5MD-S-1.8M - 1/4 ARC	1.8M Diameter - Suspended 1/4 ARC
LPL2.5MD-SM-1.8M - 1/4 ARC	1.8M Diameter - Surface Mounted 1/4 ARC
LPL2.5MD-S-2.4M - 1/4 ARC	2.4M Diameter - Suspended 1/4 ARC
LPL2.5MD-SM-2.4M - 1/4 ARC	2.4M Diameter - Surface Mounted 1/4 ARC

1/4 ARC



### STRAIGHT SECTIONS

LPL2.5MD-S-.5M-STRAIGHT	.5M - Suspended - Straight Section
LPL2.5MD-SM-.5M-STRAIGHT	.5M - Surface Mounted - Straight Section
LPL2.5MD-S-1.5M-STRAIGHT	1.5M - Suspended - Straight Section
LPL2.5MD-SM-1.5M-STRAIGHT	1.5M - Surface Mounted - Straight Section

# MOONRING 2.5 LPL2.5MD


Suspended, Surface




## 1. Mounting options

LPL2.5MD-S	Suspended
LPL2.5MID-S	Suspended Direct and Indirect
LPL2.5MD-SM	Surface Mounted


LPL2.5MD-S  
Suspended



LPL2.5MID-S  
Suspended



LPL2.5MD-SM  
Surface Mount



## 2. LED Lamping

STD - <b>xxxxK</b> (example: STD-4000K)	<b>Standard Output</b> , LED 20 W/M, 6000 delivered lm/1.2M diameter, 83 lm/W @ 4000K
---	---

HI - <b>xxxxK</b> (example: HI-4000K)	<b>High Output</b> , LED 30 W/M, 10500 delivered lm/1.2M diameter, 79 lm/W @ 4000K
---------------------------------------	--

CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K

CV - <b>xxxxK</b>	<b>Additional LED Options</b>
-------------------	-------------------------------

**Constant Voltage** (for custom lengths) - 12Vdc/24Vdc  
Contact factory for detail

TW	<b>Tunable White (2700K - 6500K)</b>
----	--------------------------------------

Contact factory for detail

RGBW - <b>xxxxK</b>	<b>Standard Output - RGB+WHITE</b> - 12Vdc/24Vdc
---------------------	--

Contact factory for detail

## 3. LED Driver - (integral or remote only - depending on fixture diameter, and driver used)

0/1-10V	0/1-10V dimming
DALI	DALI dimming
NONDIM	Non-dimmable
OTHER	(Consult factory for options)

## 4. Finish

SL	Silver Powdercoat
BK	Black powdercoat
WH	White powdercoat
Custom	Custom Color

## 5. Additional options - (integral or remote only - depending on fixture diameter, and option used)

EM	1.5 Hour Emergency Kit
MS	Motion Sensor
Others	Contact factory

# MOONRING 2.5 LPL2.5MD

Suspended, Surface

# LIGHT FORMS

### Housing

100% recyclable, extruded architectural grade T6063 aluminum

### Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup.

Consult factory for options.

### Finish

Standard finish is SILVER powdercoat.


White, Black, or custom powdercoat options are also available.



Suspension & Power



WH - WHITE



SL - SILVER



BK - BLACK



Custom/\_\_\_\_

*Default canopy finish  
is to match fitting color,  
unless otherwise  
specified*



ISO 9001:2015

#### China

Unit 3, Building A  
No. 9 Phoenix Road  
Torch Development Area  
Zhongshan City  
Guangdong China 528437

T +86 760 899 370 38  
F +86 760 899 370 39  
E [ckirin@lightforms.com.cn](mailto:ckirin@lightforms.com.cn)

#### UK

Unit 7C Boeing Way  
International Trading Estate  
Middlesex  
UB2 5LB

T +44 (0)20 8571 3785  
F +44 (0)20 8090 3755  
E [ask@lightforms.com](mailto:ask@lightforms.com)

#### India

353/2 Dr Hira Singh Road  
Civil Lines  
Ludhiana 141001  
Punjab, India

T +91 98 7280 0488  
E [ajay@lightforms.com](mailto:ajay@lightforms.com)

#### Light Forms

Architectural Lighting  
[www.lightforms.com](http://www.lightforms.com)

Registered in England  
No. 6750892  
Registered Address  
Unit 7C Boeing Way  
International Trading Centre  
Middlesex, UB2 5LB