
FIVE BOW RECESSED BURIED LENS - FBRTB

Recessed with Trim

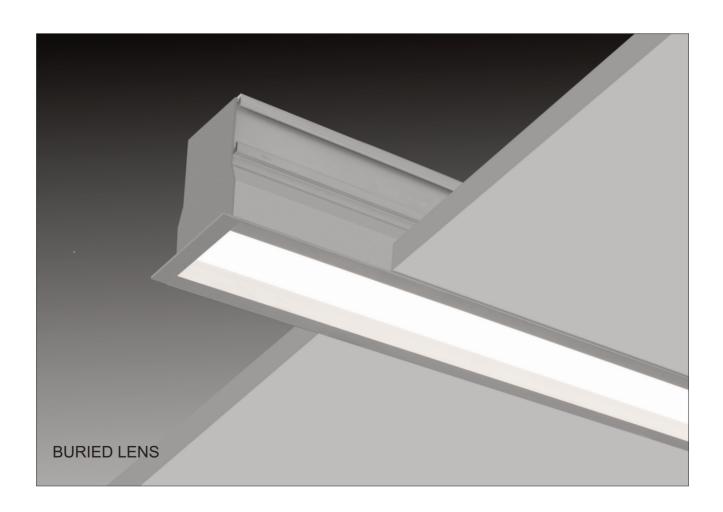


FIVE BOW RECESSED BURIED LENS FBRTB


Recessed with Trim

LIGHT FORMS

Dimensions

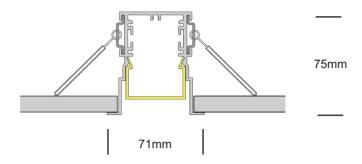

Distribution

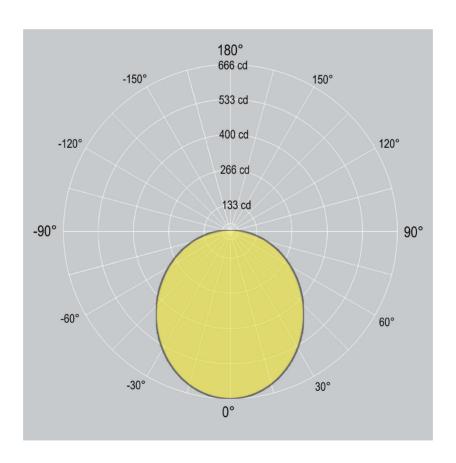

FIVE BOW RECESSED BURIED LENS FBRTB

Recessed with Trim

LIGHT FORMS

### Recessed FBRTB Recessed	1. Base Model	
2. Run Length Enter total linear length, (example: 6M) 3. Lamping STD - xxxxK (example: STD-4000K) High Output, LED 20W/M 1750 delivered lumen, 74 lm/W HI - xxxxK (example: HI-4000K) High Output, LED 30W/M 2450 delivered lumen, 70 lm/W CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K Additional LED Options CV - xxxxK Constant Voltage (for custom lengths) 24/12VDC Contact factory for detail Tunable White (2700K - 6500K) Contact factory for detail RGBW RGB+WHITE - 24/12VDC Contact factory for detail 4. Driver 0/1-10V 0/1-10V dimming DALI DALI dimming DMX DMX dimming DMX DMX dimming NONDIM NOn-dimmable (Consult factory for options) 5. Finish AL Standard, natural aluminum BK Black powdercoat Custom Custom Custom Color 6. Additional options EM 1.5 hour Emergency Kit MS Motion sensor	ERRTR	Recessed
2. Run Length Enter total linear length, (example: 6M) 3. Lamping STD - xxxxK (example: STD-4000K) Standard Output, LED 20W/M 1750 delivered lumen, 74 lm/W HI - xxxxK (example: HI-4000K) High Output, LED 30W/M 2450 delivered lumen, 70 lm/W CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K Additional LED Options CV - xxxxK Constant Voltage (for custom lengths) 24/12VDC Contact factory for detail TW Tunable White (2700K - 5500K) Contact factory for detail RGBW RGB+WHITE - 24/12VDC Contact factory for detail 4. Driver 0/1-10V 0/1-10V dimming DALI DALI dimming DALI DALI dimming DMX DMX dimming NONDIM Non-dimmable OTHER (Consult factory for options) 5. Finish AL Standard, natural aluminum BK Black powdercoat WH White powdercoat Custom Custom Color 6. Additional options	TBICIB	
2. Run Length Enter total linear length, (example: 6M) 3. Lamping STD - xxxxK (example: STD-4000K) Standard Output, LED 20W/M 1750 delivered lumen, 74 lm/W HI - xxxxK (example: HI-4000K) High Output, LED 30W/M 2450 delivered lumen, 70 lm/W CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K Additional LED Options Constant Voltage (for custom lengths) 24/12VDC Constant Voltage (for detail TW Tunable White (2700K - 6500K) Contact factory for detail RGBW RGB+WHITE - 24/12VDC Contact factory for detail 4. Driver 4. Driver 4. Driver 0/1-10V 0/1-10V dimming DALI DALI dimming DMX DMX dimming NONDIM Non-dimmable OTHER (Consult factory for options) 5. Finish AL Standard, natural aluminum BK Black powdercoat WH White powdercoat Custom Custom Color 6. Additional options		
### Enter total linear length, (example: 6M) 3.Lamping STD - xxxxK (example: STD-4000K)		Recessed
### STD - xxxxK (example: STD-4000K) ### STD - xxxxK (example: STD-4000K) ### STD - xxxxK (example: STD-4000K) #### Output, LED 20W/M 1750 delivered lumen, 74 lm/W #### Output, LED 30W/M 2450 delivered lumen, 70 lm/W #### CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K #### Additional LED Options ### Constant Voltage (for custom lengths) 24/12VDC ### Contact factory for detail ### Tunable White (2700K - 6500K) ### Contact factory for detail ### RGBW ### RGB+WHTE - 24/12VDC ### Contact factory for detail ### A. Driver ### O/1-10V ### O/1-10V dimming ### DALI		
### STD - xxxxK (example: STD-4000K) ### STD - xxxxK (example: STD-4000K) ### STD - xxxxK (example: STD-4000K) #### Output, LED 20W/M 1750 delivered lumen, 74 lm/W #### Output, LED 30W/M 2450 delivered lumen, 70 lm/W #### CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K #### Additional LED Options ### Constant Voltage (for custom lengths) 24/12VDC ### Contact factory for detail ### Tunable White (2700K - 6500K) ### Contact factory for detail ### RGBW ### RGB+WHTE - 24/12VDC ### Contact factory for detail ### A. Driver ### O/1-10V ### O/1-10V dimming ### DALI		
### Enter total linear length, (example: 6M) 3.Lamping STD - xxxxK (example: STD-4000K)		
### Enter total linear length, (example: 6M) 3.Lamping STD - xxxxK (example: STD-4000K)		
### Enter total linear length, (example: 6M) 3.Lamping STD - xxxxK (example: STD-4000K)	2. Run Length	
STD - xxxxK (example: STD-4000K) Standard Output, LED 20W/M 1750 delivered lumen, 74 lm/W		
STD - xxxx		Enter total linear length, (example: 6M)
HI - xxxxK (example: HI-4000K) High Output, LED 30W/M 2450 delivered lumen, 70 lm/W CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K Additional LED Options CV - xxxxK Constant Voltage (for custom lengths) 24/12VDC Contact factory for detail TW Tunable White (2700K - 6500K) Contact factory for detail RGBW RGB+WHITE - 24/12VDC Contact factory for detail 4. Driver 0/1-10V 0/1-10V dimming DALI DALI dimming DMX DMX dimming NONDIM Non-dimmable OTHER (Consult factory for options) 5. Finish AL Standard, natural aluminum BK Black powdercoat WH White powdercoat Custom Custom Color 6. Additional options EM 1.5 hour Emergency Kit MS Motion sensor	3.Lamping	
HI - xxxxK (example: HI-4000K) High Output, LED 30W/M 2450 delivered lumen, 70 lm/W CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K Additional LED Options CV - xxxxK Constant Voltage (for custom lengths) 24/12VDC Contact factory for detail TW Tunable White (2700K - 6500K) Contact factory for detail RGBW RGB+WHITE - 24/12VDC Contact factory for detail 4. Driver 0/1-10V 0/1-10V dimming DALI DALI dimming DMX DMX dimming NONDIM Non-dimmable OTHER (Consult factory for options) 5. Finish AL Standard, natural aluminum BK Black powdercoat WH White powdercoat Custom Custom Color 6. Additional options EM 1.5 hour Emergency Kit MS Motion sensor	STD - vvvk (evample: STD-4000K)	Standard Output 1 ED 20W/M 1750 delivered lumen 74 lm/W
CCT: 3000K 3500K 4000K Option: 2700K 5000K 6500K	OTD - AAAAR (example: OTD-4000R)	Standard Sutput, LED 2007/01 17:00 delivered fulleri, 74 iii/vv
Additional LED Options CV - xxxxK Constant Voltage (for custom lengths) 24/12VDC Contact factory for detail TW Tunable White (2700K - 6500K) Contact factory for detail RGBW RGB+WHITE - 24/12VDC Contact factory for detail 4. Driver O/1-10V O/1-10V dimming DALI DALI DALI dimming DMX DMX DMX dimming NONDIM NONDIM NON-dimmable OTHER (Consult factory for options) 5. Finish AL Standard, natural aluminum BK Black powdercoat WH White powdercoat Custom Custom Custom Color 6. Additional options EM 1.5 hour Emergency Kit MS Motion sensor	HI - xxxxK (example: HI-4000K)	High Output, LED 30W/M 2450 delivered lumen, 70 lm/W
CV - xxxxK Constant Voltage (for custom lengths) 24/12VDC Contact factory for detail TW Tunable White (2700K - 6500K) Contact factory for detail RGBW RGB+WHITE - 24/12VDC Contact factory for detail 4. Driver 0/1-10V 0/1-10V dimming DALI DALI dimming DMX DMX dimming NONDIM Non-dimmable OTHER (Consult factory for options) 5. Finish AL Standard, natural aluminum BK Black powdercoat WH White powdercoat Custom Custom Color 6. Additional options EM EM 1.5 hour Emergency Kit MS Motion sensor		CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K
Contact factory for detail Tunable White (2700K - 6500K) Contact factory for detail RGBW RGB+WHITE - 24/12VDC Contact factory for detail A. Driver		
Tunable White (2700K - 6500K) Contact factory for detail RGBW RGB+WHITE - 24/12VDC Contact factory for detail 4. Driver 0/1-10V 0/1-10V dimming DALI DALI dimming DMX DMX dimming NONDIM Non-dimmable OTHER (Consult factory for options) 5. Finish AL Standard, natural aluminum BK Black powdercoat WH White powdercoat Custom Custom Color 6. Additional options 1.5 hour Emergency Kit MS Motion sensor	CV - xxxxK	
Contact factory for detail RGBW RGB+WHITE - 24/12VDC		
RGBW RGB+WHITE - 24/12VDC Contact factory for detail 4. Driver 0/1-10V 0/1-10V 0/1-10V dimming DALI DALI dimming DMX DMX dimming NONDIM Non-dimmable OTHER (Consult factory for options) 5. Finish AL Standard, natural aluminum BK Black powdercoat WH White powdercoat Custom Custom Color 6. Additional options EM 1.5 hour Emergency Kit MS Motion sensor	TW	
A. Driver O/1-10V	DODIM	
4. Driver 0/1-10V 0/1-10V dimming DALI DALI dimming DMX DMX dimming NONDIM Non-dimmable OTHER (Consult factory for options) 5. Finish AL Standard, natural aluminum BK Black powdercoat WH White powdercoat Custom Custom Color 6. Additional options EM 1.5 hour Emergency Kit MS Motion sensor	RGBW	
0/1-10V 0/1-10V dimming DALI DALI dimming DMX DMX dimming NONDIM Non-dimmable OTHER (Consult factory for options) 5. Finish AL Standard, natural aluminum BK Black powdercoat WH White powdercoat Custom Custom Color 6. Additional options EM 1.5 hour Emergency Kit MS Motion sensor		Contact factory for detail
DALI dimming DMX DMX dimming NONDIM Non-dimmable OTHER (Consult factory for options) 5. Finish AL Standard, natural aluminum BK Black powdercoat WH White powdercoat Custom Custom Color 6. Additional options EM 1.5 hour Emergency Kit MS Motion sensor	4. Driver	
DALI dimming DMX DMX dimming NONDIM Non-dimmable OTHER (Consult factory for options) 5. Finish AL Standard, natural aluminum BK Black powdercoat WH White powdercoat Custom Custom Color 6. Additional options EM 1.5 hour Emergency Kit MS Motion sensor	0/1-10\/	0/1-10\/ dimming
DMX DMX dimming NONDIM Non-dimmable OTHER (Consult factory for options) 5. Finish AL Standard, natural aluminum BK Black powdercoat WH White powdercoat Custom Custom Color 6. Additional options EM 1.5 hour Emergency Kit MS Motion sensor		
NONDIM Non-dimmable OTHER (Consult factory for options) 5. Finish AL Standard, natural aluminum BK Black powdercoat WH White powdercoat Custom Custom Color 6. Additional options EM 1.5 hour Emergency Kit MS Motion sensor		
OTHER (Consult factory for options) 5. Finish AL Standard, natural aluminum BK Black powdercoat WH White powdercoat Custom Color 6. Additional options EM 1.5 hour Emergency Kit MS Motion sensor		
AL Standard, natural aluminum BK Black powdercoat WH White powdercoat Custom Color 6. Additional options EM 1.5 hour Emergency Kit MS Motion sensor	OTHER	
BK Black powdercoat WH White powdercoat Custom Color 6. Additional options EM 1.5 hour Emergency Kit MS Motion sensor	5. Finish	
BK Black powdercoat WH White powdercoat Custom Color 6. Additional options EM 1.5 hour Emergency Kit MS Motion sensor	AL	Standard, natural aluminum
WH White powdercoat Custom Custom Color 6. Additional options EM 1.5 hour Emergency Kit MS Motion sensor		
Custom Custom Color 6. Additional options EM 1.5 hour Emergency Kit MS Motion sensor		
EM 1.5 hour Emergency Kit MS Motion sensor		
MS Motion sensor	6. Additional options	
MS Motion sensor	EM	1.5 hour Emergency Kit
OTHER Contact Factory		
	OTHER	Contact Factory

FIVE BOW RECESSED BURIED LENS FBRTB

Recessed with Trim

LIGHT **FORMS**

Housing

100% recyclable, extruded architectural grade T6063 aluminum

Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup. Consult factory for options.

Finish

Standard finish is "Ultimatte" aluminum - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process.

White, Black, Custom powdercoat options also available.



Mitered Corners









WH - WHITE

AL - ALUMINUM

BK - BLACK

CUSTOM/













ISO 9001:2015

China Unit 3, Building A No. 9 Phoenix Road Torch Development Area Zhongshan City Guangdong China 528437

T +86 760 899 370 38 F +86 760 899 370 39 E ckirin@lightforms.com.cn

UK

Unit 7C Boeing Way International Trading Estate Middlesex UB2 5LB

T +44 (0)20 8571 3785 F +44 (0)20 8090 3755 E ask@lightforms.com

India

353/2 Dr Hira Singh Road Civil Lines Ludhiana 141001 Punjab, India

T +91 98 7280 0488

E ajay@lightforms.com

Light Forms

Architectural Lighting www.lightforms.com

Registered in England No. 6750892 Registered Address Unit 7C Boeing Way International Trading Centre Middlesex, UB2 5LB