

# SALVO

## — Floor Lamp

---

---




SALVO-1200-AL & SALVO-1800-AL


## Features

- 360° tube light distribution
- Built-in driver, dim or non-dim available
- Built-in sensor
- Wide range of finishes
- 100% recyclable, extruded architectural grade T6063 aluminum

## Dimensions

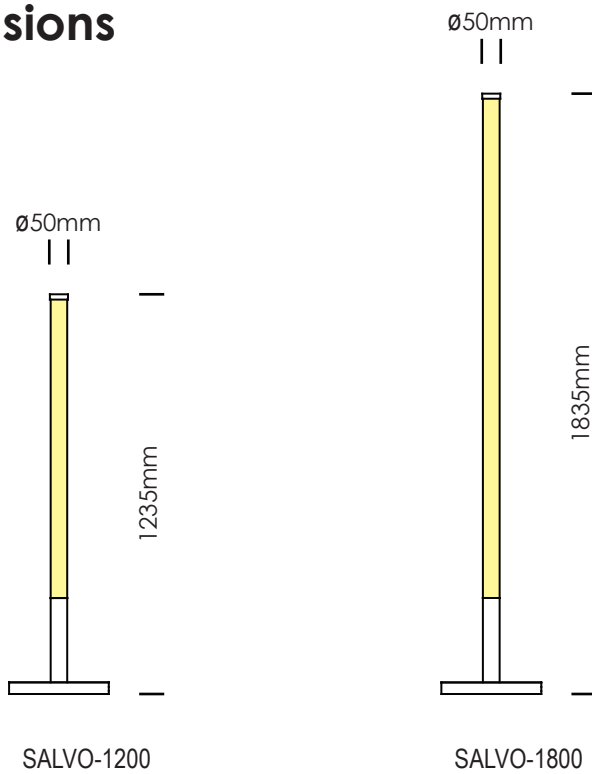

## Distributions

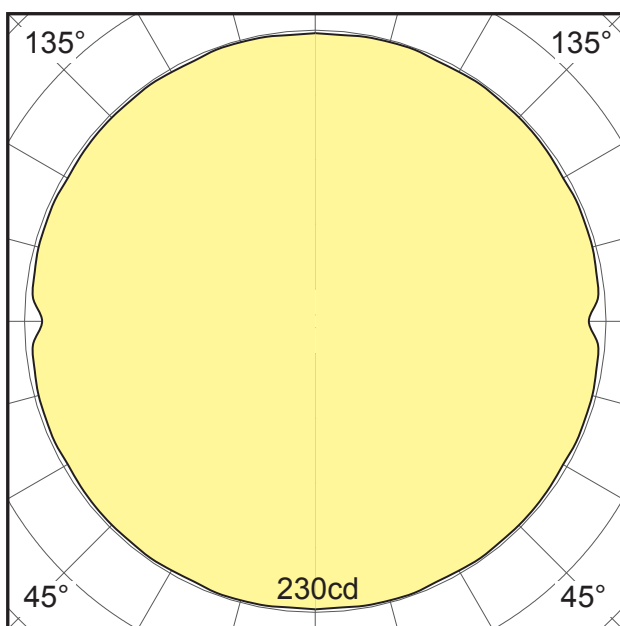

SALVO-1200

## Ordering Info

### 1. BASIC MODEL

SALVO-1200 1235mm in height

SALVO-1800 1835mm in height

### 2. LED LAMPING

**STD - xxxxK** Linear LED strip, standard output, LED 25W/M

**HI - xxxxK** Linear LED strip, high output, LED 34W/M

*Note: Standard CCT: 3000K, 3500K, 4000K; CRI80 and CRI90 are available.*

*Other option: 2700K, 5000K, 5700K, 6500K, red, green, blue, TUNE(2700K-6500K). Contact factory for details.*

*See page 4 for information of LED lamping output.*

### 3. DRIVER

**STD** Non-dimmable

**0/1-10V** 1-10V / 0-10V dimming

**DALI** DALI dimming

**DMX** DMX dimming

**OTHER** Consult factory for options

### 4. FINISH

**BK** Matt black powercoat

**WH** Matt white powercoat

**SG** Silver grey powercoat

**CF** Custom finish - RAL or Pantone or other finish options




Matt black



Matt white



Silver grey



Custom

**5. OPTIONAL ADD-ONS**

<b>EM</b>	1.5 hour emergency kit (remote only)
<b>SS</b>	PIR sensor
<b>MS</b>	Motion sensor
<b>OTHERS</b>	Consult factory for options

**SPECIFICATION DETAILS**

**PERFORMANCE DATA - LED LAMPING**

OUTPUT OPTIONS	DELIVERED LUMENS	WATTS	CRI OPTIONS	CCT OPTIONS	LED LAMPING
SV-1200-STD	2090	25	80 90	2700K 3000K 3500K 4000K 5000K 6500K	LED strip
SV-1200-HI	2819	33.7			LED strip
SV-1800-STD	3098	37			LED strip
SV-1800-HI	4264	51			LED strip

*Note: Data provided for LED strip options is from a photometric test of 1.2 meter fixture output with 90CRI at 4000K using a non-dimmable driver.*



*More information and data,  
please visit:  
[www.lightforms.com.cn](http://www.lightforms.com.cn)*

V1.0\_2021-09